

Data current as of: 27-04-2024 18:58

Link to the product: <https://shop.skylight.blue/aqir-fluo-40s-p-90.html>




AQIR FLUO-40S

Availability

Niedostępny

Product description

SKYLIGHT AQIR FLUO-40S

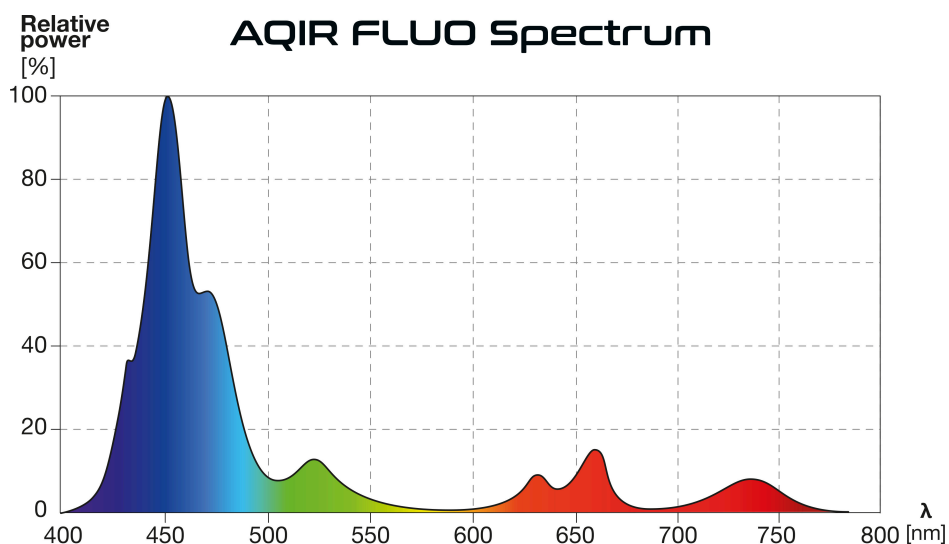



- Intense colours
- Broadened spectrum
- Better contrast

ACTINIC CHANNEL

A blend of violet-blue light wavelengths allows for observation of the fluorescence of coral protective pigments.

DAYLIGHT CHANNEL

So called RGB construction of the daylight channel allows for observation of the vivid colours of the non-fluorescent reef organism such as fish.

WATERPROOF CONSTRUCTION

Waterproof casing and safe 12 V supply voltage allows for mounting of the luminaire in hoods.

COLOUR TEMPERATURE / ADJUSTMENT DIMMABLE

The daytime schedule (sunrise, sunset, day, night) can be separately set for actinic and daylight channel using the AQCT-2 controller (included).

LIMITED GLARE

AQIR lamps have been equipped with so called shades. The side glare is reduced allowing for a more pleasant observation of the aquarium.

PASSIVE COOLING

Using a heatsink with a large enough surface provides enough cooling without the use of potentially loud and relatively unreliable fans.

SHIMMER

With some water surface movement provided AQIR lamps produce a naturally looking shimmer.

MOUNTING FREEDOM


AQIR series lamps are manufactured in 2 different configurations. The H version is equipped with acrylic holders and the lamp is put on aquarium edges. The S version is equipped with a metal wire hanging suspension kit that allows to hang the lamp over the aquarium.

TECHNICAL SPECIFICATION

Dimensions	36x10 cm
Power rating	30 W
Colour Temperature	12 000 - 25 000 K
Voltage rating	12 V DC
Current rating	2,5 A
Output cable length	2,5 m*
Suggested aquarium width	35-50 cm
Max length of the hanging suspension kit	150 cm

*Lamp input cable: 0,75 m / Lamp cable extender: 0,75 m / Power adapter output cable: 1 m

AQIR FLUO-40 S/H

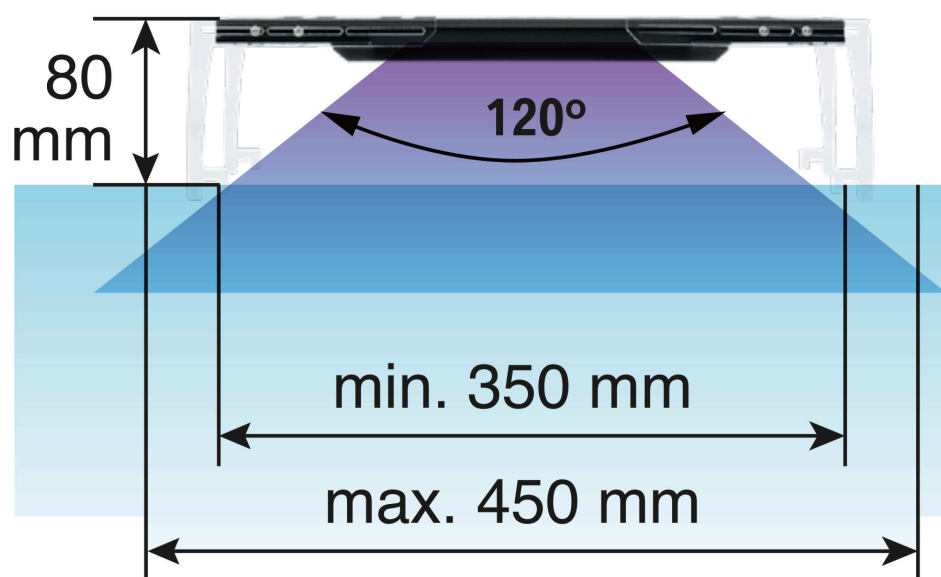



**ACTINIC
CHANNEL**



**DAYLIGHT
CHANNEL**




**WATERPROOF
CONSTRUCTION**



**COLOUR
TEMPERATURE
ADJUSTMENT**




DIMMABLE




**LIMITED
GLARE**



**PASSIVE
COOLING**



SHIMMER



**MOUNTING
FREEDOM**